

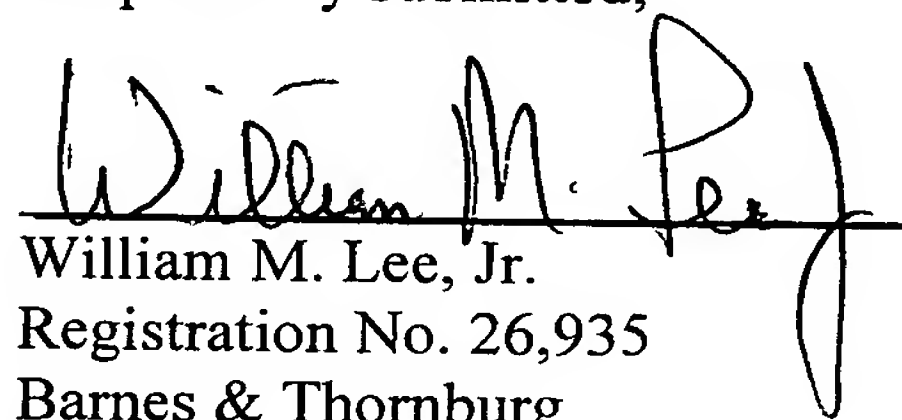
Remarks

The above amendments are being made in order to eliminate claims 11 and 12 and the subject matter related thereto, as well as eliminate multiple dependency and improper multiple dependency. Should any multiple dependent claims remain, that is unintended, and the Patent and Trademark Office is requested to cancel any remaining multiple dependent claims without prejudice before calculation of the national filing fee for the United States.

Examination of the application on its merits is awaited.

January 25, 2005

Respectfully submitted,

A handwritten signature in black ink, appearing to read "William M. Lee, Jr.", is written over a horizontal line.

William M. Lee, Jr.

Registration No. 26,935

Barnes & Thornburg

P.O. Box 2786

Chicago, Illinois 60690-2786

(312) 214-4800

(312) 759-5646 (fax)

DT05 Rec'd PCT/PTO 25 JAN 2005

C1384.01/M

TITLE: OPTICAL PROJECTION TOMOGRAPHY

5

Field of the Invention

This invention relates to optical projection tomography.

10

Background to the Invention

Optical projection tomography is a technique for producing three-dimensional images of specimens, one example being disclosed in the applicant's specification WO 02/095476.

15 The invention aims to provide a different way of optically processing the light emanating from the specimen, with a view to increasing the content and quality of information obtained from the specimen.

20 **Summary of the Invention**

According to one aspect of the invention apparatus for obtaining an image of a specimen by optical projection tomography comprises light scanning means, a rotary stage for rotating the specimen to be imaged, an optical system and a light detector, wherein light
25 from the scanning means scans the specimen and the optical system is operative, throughout the scanning movement of the light, to direct onto the detector only light which exits or by-passes the specimen parallel to the beam incident on the specimen.

The optical system is preferably a convex lens which causes convergence of light incident
30 thereon but directs onto the detector light exiting the specimen parallel to the beam incident

on the specimen. A concave mirror or diffraction grating could be used instead of the convex lens.

In a preferred embodiment, the light scanning means form part of a confocal scanning microscope and the rotary stage (corresponding to the rotary stage disclosed in the applicant's co-pending International Patent Application No. PCT/GB02/02373) includes a stationary chamber within which the specimen is suspended.

The light detector may be a localised detector positioned, so as to receive only light which exits or by-passes the specimen at the same angle as the beam incident on the specimen.

However, the light detector may form part of a one-dimensional, i.e. linear, array. In this case, one detector of the array constitutes the light detector and the other detectors of the array constitute auxiliary detectors which detect scattered and/or refracted light. The intensities of light received by the auxiliary detectors can be used to provide information on the spatial distribution of refractive/scattering characteristics within the specimen.

This approach can be extended to provide a two-dimensional array of detectors, with one detector constituting the light detector and the other detectors constituting auxiliary detectors which detect scattered and/or refracted light in the additional planes.

According to another aspect of the invention there is provided an optical system for use in apparatus for obtaining an image in optical projection tomography, the optical system receiving light from a specimen scanned by a light beam and being operative to direct onto a detector only light which exits or by-passes the specimen parallel to the beam incident on the specimen.

According to a yet further aspect of the invention there is provided a method of obtaining an image of a specimen in optical projection tomography, the method comprising moving a light beam across the specimen with a scanning motion, passing the light emanating from the specimen onto a detector which, throughout the scanning movement of the light,

detects light which exits or by-passes the specimen parallel to the beam incident on the specimen.

5 In the simplest method, there is no optical power between the specimen and the detector, spatial discrimination being achieved through the positioning of the detector.

According to another aspect of the present invention, there is provided a method of performing any one or more of the analyses or procedures listed hereunder comprising use of a method or apparatus of any of the aspects set out above.

10

~~There is also provided use of a method or apparatus as described in any of the aspects as set out above in any one or more of the analyses or procedures listed hereunder.~~

15

According to the present invention, the analyses and procedures of the present invention include:

Analysis of the structure of biological tissues.

Analysis of the function of biological tissues.

Analysis of the shapes of biological tissues.

20

Analysis of the distribution of cell types within biological tissues.

Analysis of the distribution of gene activity within biological tissues, including the distribution of:

- RNA transcripts

- proteins

25

Analysis of the distribution of transgenic gene activity within biological tissues,

Analysis of the distribution of cell activities within biological tissues,

including:

- Cell cycle status including arrest

- Cell death

30

- Cell proliferation

- Cell migration

~~Analysis of the distribution of physiological states within biological tissues.~~

~~Analysis of the results of immunohistochemistry staining techniques.~~

~~Analysis of the results of in-situ hybridisation staining techniques.~~

~~Analysis of the distribution of molecular markers within biological tissues,~~

5 ~~including any coloured or light-absorbing substances, such as:~~

~~5,5'-dibromo-4,4'-dichloro-indigo (or other halogenated indigo compounds)~~

~~formazan~~

~~or other coloured precipitates generated through the catalytic activity of enzymes~~

~~including: b-galactosidase, alkaline phosphatase or other coloured precipitates formed upon~~

10 ~~catalytic conversion of staining substrates,~~

~~including: Fast Red, Vector Red~~

~~And including any light-emitting substances,~~

~~Therefore including any fluorescent substances,~~

~~such as: Alexa dyes, FITC, rhodamine,~~

15 ~~And including any luminescent substances,~~

~~such as green fluorescent protein (GFP) or similar proteins,~~

~~And including any phosphorescent substances.~~

~~Analysis of tissues from all plant species.~~

20 ~~Analysis of any tissue for agricultural research,~~

~~including:~~

~~basic research into all aspects of plant biology (genetics, development, physiology,
pathology etc.)~~

~~analysis of tissues which have been genetically altered.~~

25

~~Analysis of tissues from all animal species.~~

~~including:~~

~~invertebrates~~

~~nematode worms~~

30 ~~vertebrates~~

~~all types of fish (including teleosts, such as zebrafish, and chondryethes including sharks)~~

~~amphibians (including the genus Xenopus and axolotls)~~

~~reptiles~~

~~birds (including chickens and quails)~~

~~all mammals (including all rodents, dogs, cats and all primates, including human)~~

Analysis of embryonic tissues for any purpose,
including:

research into any stem cell population

research into developmental biology

research into the causes of abnormal embryo development, including human syndromes

autopsies of human terminated pregnancies (both spontaneous and induced terminations)

Analysis of any tissues for the purpose of genomics research,
including:

the analysis of any tissues for the purpose of genomics research,

including:

the analysis of transgenic, knock-in, knock-down or knock-out organisms

the analysis or discovery of the expression (or activity) of genes including their spatial distribution, and their levels of expression

the analysis or discovery of abnormalities in the structure or morphology of tissues, as a result of interference due to wilful experimentation (such as genetic or physical modifications including a chemical or biochemical genomics approach), and/or spontaneous abnormalities (such as naturally-occurring mutations)

Analysis of any tissue for the purpose of neurobiology research,

~~including:~~

~~the analysis of the morphology of nerves~~

the analysis of the pathways and connectivity of nerves

the analysis of parts of, or whole, animal brains

5 Analysis of any tissue for pharmaceutical research,

including:

the analysis of pharmaceutical substances (such as drugs, molecules, proteins, antibodies),

including their spatial distribution within the tissue, and their concentrations

10 the analysis or discovery of abnormalities in the structure or morphology of tissues.

Analysis of tissues for medical research,

including:

15 research into the genetics, development, physiology, structure and function of animal tissues

analysis of diseased tissue to further our understanding of all types of diseases

including:

congenital diseases

acquired diseases

20 including:

infectious

neoplastic

vascular

inflammatory

25 traumatic

metabolic

endocrine

degenerative

drug-related

30 iatrogenic or

~~idiopathic diseases~~

~~Analysis of tissues for medical diagnosis, treatment or monitoring,~~
~~including:~~
5 the diagnosis of cancer patients
 ~~including:~~
 searching for cancerous cells and tissues within biopsies
 searching for abnormal structure or morphology of tissues within biopsies
 the analysis of all biopsies
 including the analysis of:
10 lymph nodes
 polyps
 liver biopsies
 kidney biopsies
 prostate biopsies
15 muscle biopsies
 brain tissue
 the analysis of tissue removed in the process of extracting a tumour from a patient
 including:
 determining whether all the tumour has been removed
20 ~~determining the type of tumour, and the type of cancer.~~

According to the present invention, samples for use in the present invention may be prepared as described in the earlier patent applications and/or employing conventional pathological and histological techniques and procedures well known to persons skilled in
25 the art.

For example, in-situ hybridisation (particularly useful for detecting RNAs): Hammond K L, Hanson I M, Brown A G, Lettice L A, Hill R E "Mammalian and Drosophila dachsund genes are related to the Ski proto-oncogene and are expressed in eye and limb". Mech.
30 Dev. 1998 Jun;74(1-2):121-31.

Immunohistochemistry (particularly useful for detecting proteins and other molecules):

Sharpe J, Ahlgren U, Perry P, Hill B, Ross A, Hecksher-Sorensen J, Baldock R, Davidson D. "Optical projection tomography as a tool for 3D microscopy and gene expression studies" Science. 2002 Apr 19;296(5567):541-5.

It will be appreciated that modification may be made to the invention without departing from the scope of the invention.

Brief Description of the Drawings

The invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a diagram of the apparatus forming the preferred embodiment of the invention,

Figures 2a and 2b show how the microscope optics of the apparatus can be arranged to have low numerical aperture or high numerical aperture,

Figure 3 shows known image-forming optics,

Figures 4 and 5 show the image-forming optics of an optical system of the inventive apparatus,

Figures 6a, 6b, 6c and 6d show representative light paths for the optical system of the inventive apparatus,

Figures 7a, 7b and 7c illustrate how different degrees of refraction affect operation of the optical system,

Figure 8 illustrates how refraction is measured using a one-dimensional array of detectors, and

5 Figures 9 to 12 illustrate, in three dimensions, the operation of the optical system.

Detailed Description of the Drawings

10 Referring to Figure 1, the apparatus comprises a light source 1 (in the form of a laser) which supplies light to a two-dimensional light scanning means 2, the scanning mechanism of which has a dual mirror system. Light with a scanning motion is fed through image-forming optics 3. A dichroic mirror 4 interposed between the light source 1 and the scanning means 2 directs returned light to a high speed light detector 5. The components 1
15 to 5 may be provided by a confocal light-scanning microscope.

Light from the optics 3 passes through a specimen 6 which is rotated within, and supported by, a rotary stage 7 which in structure corresponds to the rotary stage disclosed in the applicant's co-pending International Patent Application No. PCT/GB02/02373. The rotary
20 stage 7 rotates the specimen to successive indexed positions at each of which one complete scan of the excitation light is undertaken whilst the specimen is stationary. After passing through the specimen 6, the light is processed by an optical system 8 which directs the light to a one-dimensional or two-dimensional array of high speed light detectors 9.

25 In fluorescence mode, light from the specimen 6 is returned through the optics 3 and the scanning means 2 and thence, via the mirror 4, to the high speed light detector 5. It is in the transmission mode, to be described, that the new arrangement of optics and detectors is used.

The microscope optics 3 may have a high numerical aperture (Figure 2a) or may be adapted to have a low numerical aperture (Figure 2b) which is useful for some specimens to be imaged.

5 Figure 3 illustrates a known image-forming system. The light from any point on the focal plane 12 (within the specimen) is collected and refracted by a lens 13 towards a single point in the image plane 14. There exists a symmetry such that any point on the image plane 14 maps to a point in the focal plane 12 and *vice versa*.

10 By contrast, the need for an *image-forming* optical arrangement is removed in the inventive “non-focal” optics of Figures 4 and 5 which displays no such symmetry. The non-focal optical system 8 is represented by a convex lens 15. The light from a single point on the focal plane 12 is not focussed onto a single light detector. It is diverged such that only the light which exits or by-passes the specimen 6 parallel to the incident beam reaches the
15 single light detector 9a positioned on the optical axis. The purpose of the lens 15 in Figures 4 and 5 is different from Figure 3. It functions in a light-scanning situation. The light beam is scanned (e.g. in a raster pattern) across the specimen through a multitude of different positions (five of which are illustrated as the black arrows in Figure 5). The purpose of the non-focal optical system 8 (i.e. the lens 15) is to direct onto the single light
20 detector 9a, light which exits or by-passes the specimen parallel to the incident beam, irrespective of the scanning position of the light beam. In specimens which cause significant scattering of light the system allows a higher signal-to-noise ratio to be obtained by limiting detection of scattering light.

25 Figures 6a to 6d, which illustrate scattering as an example to show deviation from the original beam position, illustrate some representative light paths for rays (derived from a laser beam) emitted from the specimen 6 while passing through the non-focal optical system. The beam approaching the specimen from the left is the beam incident on the specimen.

In Figure 6a rays scattered from a point in the centre of the specimen 6 are diverged away from the light detector 9a. The proportion of scattered rays which are detected can be adjusted by changing the effective size of the detector. An adjustable iris allows this control (which is very similar to the pin-hole in a scanning confocal microscope).

5 Alternatively, the position of the lens can be adjusted to cause more or less divergence of the scattered rays. In optical image-forming systems, an airy disc is the interference pattern produced by the light emitted from a single point within the specimen. Optical systems which produce larger airy discs have lower resolving power, as airy discs from neighbouring points within the specimen will overlap. The concept of the airy disc is not
10 strictly relevant to a projection-measuring system like this, however a similar concept does exist. In the case of the non-focal optics described here, light from each projection creates a very broad distribution of intensities (at the position of the detector) similar to a broad airy disc, which might suggest low resolving power. However, as only a single projection is measured at any one time even very broad distributions cannot interfere with each other.

15 In Figure 6b rays scattered from other points along the same line sampled in Figure 6a, are also diverged away from the light detector 9a.

In Figure 6c unscattered light from a different scanned position (black arrow) is emitted
20 from the specimen 6 substantially parallel to the optical axis, and is therefore refracted towards the light detector 9a. As in Figures 6a and 6b, scattered light is directed away from the detector 9a.

In Figure 6d unscattered rays from any scanned position are directed onto the light detector
25 6. The arrows represent successive positions of the laser beam as it is scanned across the specimen 6 in a direction perpendicular to the optical axis.

All experiments done so far with optical projection tomography have had to assume that although some of the light is scattered, the refractive index of the specimen is uniform.

30 Recent experiments have demonstrated that a number of important specimens (including medical imaging of biopsies) display non-uniform refractive indexes. This means that the

current algorithms are not accurately imaging the specimen – distortions and artefacts are introduced. The apparatus described reduces this problem by measuring information not previously available relating to the angle at which a light beam exits from the specimen. In general, in specimens with low scattering but non-uniform distribution of refractive index the system allows this non-uniform distribution to be calculated by measuring the degree of refraction experienced by each projection.

In the use of the present apparatus a clearing agent (such as BABB) is used such that the majority of the light is not scattered. It is however subject to a different form of disruption – refraction. In Figure 7, scattered light is indicated by broken lines, while the main path of light is shown as a solid line. In the first example of Figure 7a this path is not bent as it passes through the specimen 6 (it is only refracted on passing through the lens). The main path does pass through a region of the specimen with a higher refractive index than the rest (grey disc), however both the interfaces it encounters between regions of differing refractive index are perpendicular to the light path, so no refraction occurs.

In the second case of Figure 7b, the illumination beam is slightly higher and therefore the interfaces it encounters between the grey region and the white region of the specimen (different refractive indexes) are slightly displaced from perpendicular. This causes two slight refractions of the main path such that when the light emerges from the specimen it is no longer parallel to the incident beam and is directed slightly to the side of the original central light detector 9a. If auxiliary light detectors 9b are positioned on either side of the central detector 9a, these can measure the degree of refraction. Any projection will give a certain distribution of intensities along the array of light detectors. The distribution of intensities can be used to determine the angle at which the main light path emerged from the specimen. In the last case of Figure 7c, a different scanned position has caused greater refraction of the beam, which is reflected in a further shift along the array of detectors.

In Figure 8, an oblong region of the specimen 6 has a higher refractive index (grey shape) than the rest. Rays passing around the specimen are not refracted and so are directed to the central light detector 9a. Rays passing through the middle of the specimen (middle two

rays 11 in Figure 8) are refracted twice. The two interfaces which the light passes through (white-to-grey and then grey-to-white) are parallel with each other, and the light rays therefore exit the specimen at the same angle that they entered it. These rays are also directed onto the central detector 9a. Rays passing through other parts of the grey region are also refracted twice but do not pass through parallel interfaces, so these rays are detected by the adjacent light detectors 9b.

The fact that some rays will be refracted and still exit the specimen 6 parallel to the incident beam is not a problem. The example of Figure 8 shows only one of the many sets of projections taken through this section. Full imaging involves capturing such a data set for many orientations through the section, and the combination of all this data allows a full reconstruction of the distribution.

Figures 9 to 12 show three-dimensional views of the apparatus. In Figure 9, all unrefracted (and unscattered) rays through a two-dimensional section of the specimen are focused onto the central light detector of the array. The specimen 6 is rotated about a vertical axis between indexed positions in each of which a complete scan is undertaken.

Figure 10 shows the path of scattered or refracted light onto auxiliary light detectors.

Figure 11 illustrates that the lens (or optical system) allows the one-dimensional array of detectors 9 to capture data from a full two-dimensional raster-scan of the specimen. A row of scanned positions is always directed down or up to the row of detectors, irrespective of the vertical height of the scan.

A two-dimensional array of light detectors 9 may be used instead of a one-dimensional array, as shown in Figure 12. This would be able to measure light which is scattered or refracted above or below the plane occupied by the light rays shown in Figure 12.

The data derived from the detector array 9 optics is interpreted by an algorithm.

Many different algorithmic approaches already exist for performing back-projection calculations. One approach is to use a standard linear filtered back-projection algorithm (as in US Patent 5680484). Other approaches include iterative, maximum entropy and algebraic reconstruction technique. (R. Gordon et al., "Three-Dimensional Reconstruction
5 form Projections: A Review of Algorithms".

The algorithm works as follows:

1. The data is used as if it were parallel (or fan-beam) data to perform back-projection.
10 This produces a "fuzzy" estimation of the distribution of absorption characteristics of the specimen, or alternatively a fuzzy distribution of the fluorescence of the specimen.
2. A first approximation of the distribution of refractive index is estimated. This can be done in a number of ways. One useful method is to assume that the absorption or
15 fluorescent distribution will reflect the distribution of refractive index. Within each section a 2-D gradient vector is calculated for each voxel. An alternative is to start with a uniform or a random distribution.
3. The estimated refraction distribution is used to perform a forward-projection, i.e. a
20 prediction of what the projection data should look like if the initial estimate of the refraction distribution was correct.
4. The predicted projections and the actual projections are compared.
- 25 5. The estimated refraction distribution is modified. The projections with a greater difference between predicted and actual, pin-point which regions of the distribution need more modification. For example, in the case of the grey shape shown in Figure 8, projections from the curved ends of the oblong will differ greatly from the predictions due to the large amount of refraction. Voxels in the regions therefore have
30 their predicted refraction indexes changed more than other regions.

6. The loop from 3 to 6 is repeated until no further improvements to the predicted projections can be made.

5 The algorithm approach above can also be used to interpret other optical signals, for example fluorescence or scattering.

~~The apparatus and methods can be used in various analyses and procedures, as set out below:~~

- 10 Analysis of the structure of biological tissues.
Analysis of the function of biological tissues.
Analysis of the shapes of biological tissues.
Analysis of the distribution of cell types within biological tissues.
Analysis of the distribution of gene activity within biological tissues,
15 including the distribution of:
 - RNA transcripts
 - proteins
Analysis of the distribution of transgenic gene activity within biological tissues,
Analysis of the distribution of cell activities within biological tissues,
20 including:
 - Cell cycle status including arrest
 - Cell death
 - Cell proliferation
 - Cell migration
25 Analysis of the distribution of physiological states within biological tissues.
Analysis of the results of immunohistochemistry staining techniques.
Analysis of the results of in-situ hybridisation staining techniques.
Analysis of the distribution of molecular markers within biological tissues,
including any coloured or light-absorbing substances,
30 such as:

~~5,5' dibromo 4,4' dichloro indigo (or other halogenated indigo compounds)~~

~~formazan~~

~~or other coloured precipitates generated through the catalytic activity of enzymes~~

~~including: b-galactosidase, alkaline phosphatase or other coloured precipitates
formed upon catalytic conversion of staining substrates,~~

~~including: Fast Red, Vector Red~~

~~And including any light-emitting substances,~~

~~Therefore including any fluorescent substances,~~

~~such as: Alexa dyes, FITC, rhodamine,~~

~~And including any luminescent substances,~~

~~such as green fluorescent protein (GFP) or similar proteins,~~

~~And including any phosphorescent substances.~~

Analysis of tissues from all plant species.

Analysis of any tissue for agricultural research,

including:

basic research into all aspects of plant biology (genetics, development, physiology,
pathology etc.)

analysis of tissues which have been genetically altered.

Analysis of tissues from all animal species,

including:

invertebrates

nematode worms

vertebrates

all types of fish

(including teleosts, such as zebrafish, and chondrycthes including sharks)

amphibians (including the genus Xenopus and axolotls)

reptiles

birds (including chickens and quails)

~~all mammals (including all rodents, dogs, cats and all primates, including human)~~

~~Analysis of embryonic tissues for any purpose,~~

~~including:~~

~~research into any stem cell population~~

~~research into developmental biology~~

5 ~~research into the causes of abnormal embryo development, including human syndromes~~

~~autopsies of human terminated pregnancies (both spontaneous and induced terminations)~~

10 Analysis of any tissues for the purpose of genomics research,

including:

the analysis of transgenic, knock-in, knock-down or knock-out organisms

the analysis or discovery of the expression (or activity) of genes including their spatial distribution, and their levels of expression

15 the analysis of discovery of abnormalities in the structure or morphology of tissues, as a result of interference due to wilful experimentation (such as genetic or physical modifications including a chemical or biochemical genomics approach), and/or spontaneous abnormalities (such as naturally-occurring mutations)

20 Analysis of any tissue for the purpose of neurobiology research,

including:

the analysis of the morphology of nerves

the analysis of the pathways and connectivity of nerves

the analysis of parts of, or whole, animal brains

25

Analysis of any tissue for pharmaceutical research,

including:

the analysis of pharmaceutical substances (such as drugs, molecules, proteins, antibodies),

30 including their spatial distribution within the tissue, and their concentrations

~~the analysis or discovery of abnormalities in the structure or morphology of tissues~~

Analysis of tissues for medical research,

including:

research into the genetics, development, physiology, structure and function of
animal tissues

analysis of diseased tissue to further our understanding of all types of diseases

including:

congenital diseases

acquired diseases

including:

infectious

neoplastic

vascular

inflammatory

traumatic

metabolic

endocrine

degenerative

drug-related

iatrogenic or

idiopathic diseases

Analysis of tissues for medical diagnosis, treatment or monitoring,

including:

the diagnosis of cancer patients

including:

searching for cancerous cells and tissues within biopsies

searching for abnormal structure or morphology of tissues within biopsies

the analysis of all biopsies

including the analysis of:

lymph nodes

5 polyps
liver biopsies
kidney biopsies
prostate biopsies
muscle biopsies
brain tissue
the analysis of tissue removed in the process of extracting a tumour from a patient
including:
determining whether all the tumour has been removed
10 ~~determining the type of tumour, and the type of cancer.~~

It will be appreciated that modification may be made to the invention without departing from the scope of the invention.